




APOLLO

Enhancement of food presentation

- Easy access from front and back
- Lift up double curved glass
- Stable temperature performance
- Wide range of lighting solutions

Product overview

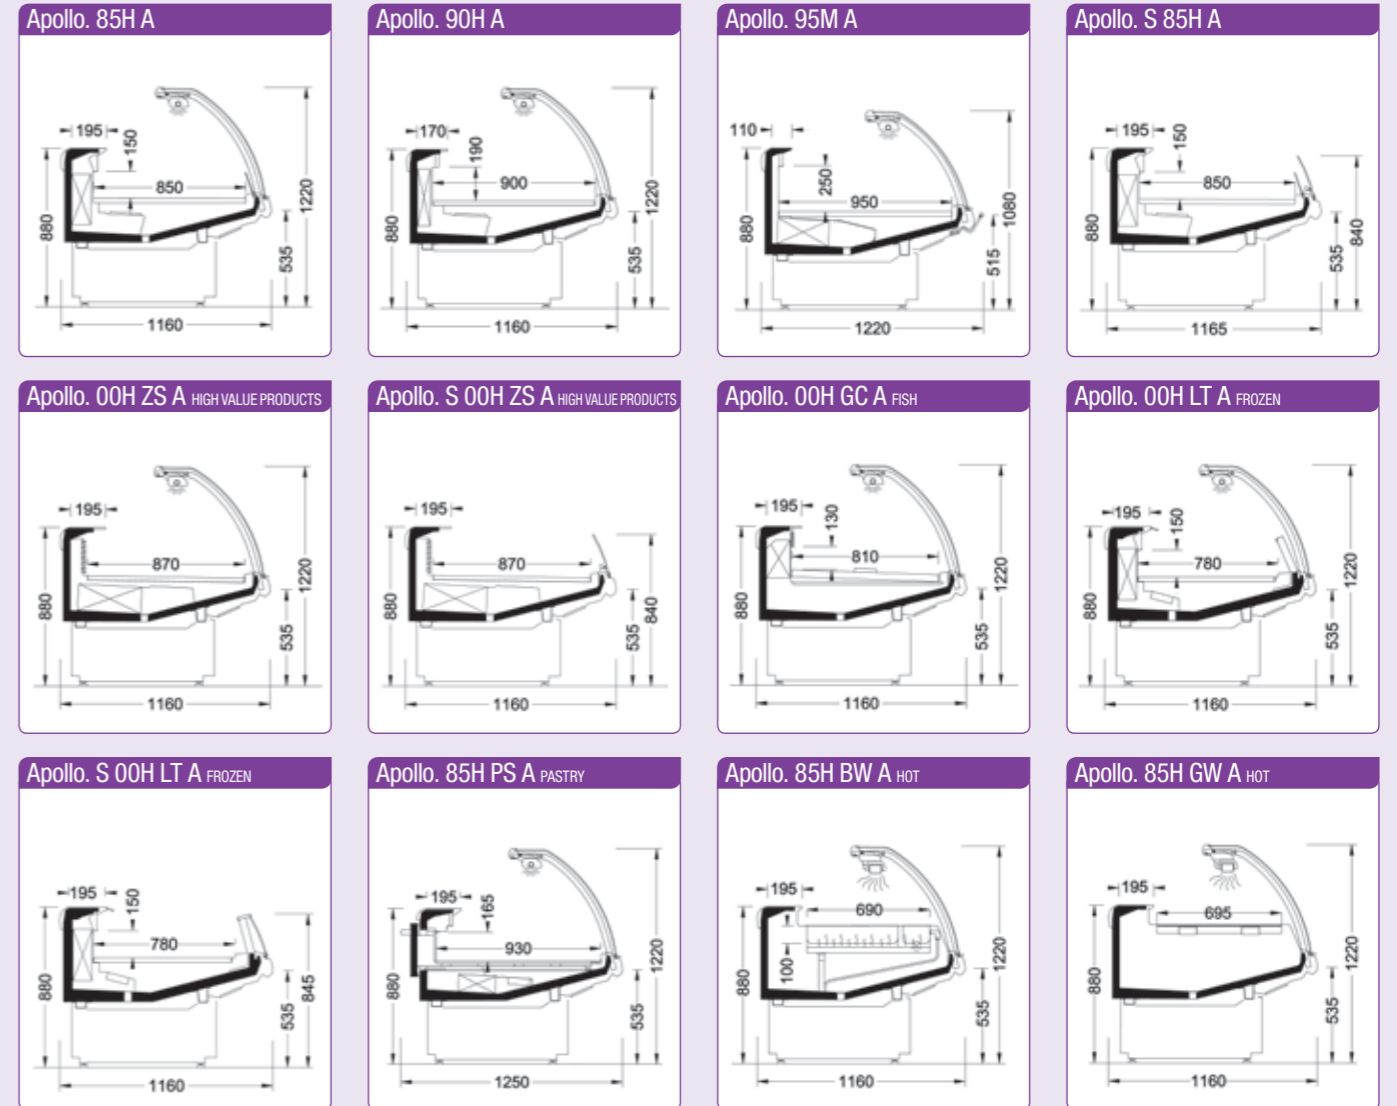

Apollo	Modules												
	63	94	125	156	188	250	312	375	EC45	EC90	IC45	IC90	CE*
	Total display area (m ²)												
Apollo. 85H A	0.53	0.80	1.06	1.30	1.59	2.13	2.66	3.19	0.98	1.60	1.09	2.18	-
Apollo. 90H A	0.57	0.84	1.13	1.41	1.69	2.25	2.81	3.38	1.04	1.70	1.16	2.32	1.98
Apollo. 95M A	-	0.89	1.18	1.48	1.77	2.37	2.95	3.54	1.08	1.76	1.25	2.50	2.09
Apollo. 00H ZS A	-	-	1.09	-	1.63	2.17	-	3.26	1.01	1.64	1.14	2.28	-
Apollo. 00H GC A	-	-	1.00	-	1.50	2.00	-	3.00	-	-	-	-	-
Apollo. 00H LT A	-	-	0.98	-	1.46	1.95	-	2.93	-	-	-	-	-
Apollo. 85H/90H PS A	-	-	1.16	-	-	2.32	-	3.48	-	-	-	-	-
Apollo. 85H/90H/95M BW A	-	0.50	0.71	-	-	-	-	-	-	-	-	-	-
Apollo. 85H/90H/95M GW A	-	0.54	0.78	-	-	-	-	-	-	-	-	-	-
Temperature range** (°C)						0/+2	+2/+4	+4/+6	-18/-20	-22/-24			

* Crown End available for self-service version.

** These temperature ranges are shown in general for the refrigerated cabinets. Please refer to the technical manual to match the right temperature range to the different versions.